



# Specification For Approval

## AC Blower

**Model: KMB2AD133MB2**

**Version: A01**

<b>Approval</b>	<b>Checked</b>	<b>Editor</b>
<b>Taylor Chen</b>	<b>Zheng</b>	<b>Tom</b>

<b>Customer</b>		
<b>Customer recognition</b>	<b>Acceptance</b>	<b>Approval</b>

## DATA SHEET

Model : KMB2AD133MB2


Customer P/N:

Safety:

### SPECIFICATION

1. Dimension	172x182x254 mm
2. Bearing System	2 Ball Bearing
3. Rated Voltage	220 VAC 50Hz
4. Operating Voltage	198~242 VAC
5. Starting Voltage	198VAC
6. Capacitance	2.5 $\mu$ F/500 VAC
7. Speed Control	3 Speed
8. Input Current	0.28/0.32/0.36 A
9. Input Power	60/70/80 W
10. Rated Speed	750/1050/1250 $\pm$ 10% RPM
11. Rotation	Clockwise, seen on rotor
12. Air Flow	350/500/580 m <sup>3</sup> /h
13. Static Air Pressure	83/93/ 110 Pa
14. Noise Level	46/52/55 dB(A)
15. Lead Wire	RVVP L=500 $\pm$ 20mm
16. Connector	NO
17. Ambient temperature	-30~60°C
18. Life Expectance	30,000 hours continuous operating at 20°C
19. Insulation class	"F"
20. Type of protection	IP44
21. Number of blades	38
22. Dielectric Strength	1800VAC,60Hz, 1 min, Leakage current $\leq$ 2.0 mA
23. Net Weight	3000g
24. Packing	Corrugated carton, pcs/carton

# PERFORMANCE CURVES

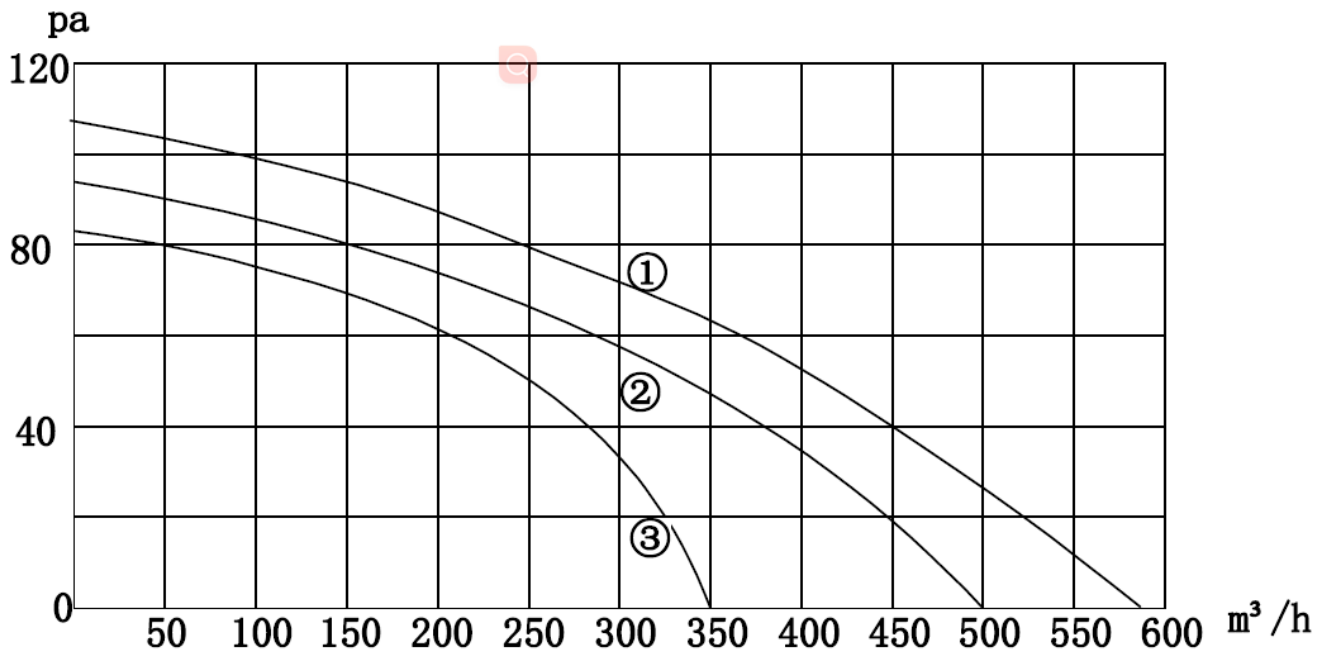

## Connection methods



## Product Outline

